

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G05B 19/409, B25J 9/16	A1	(11) International Publication Number: WO 98/50834 (43) International Publication Date: 12 November 1998 (12.11.98)
(21) International Application Number: PCT/US98/09226 (22) International Filing Date: 6 May 1998 (06.05.98) (30) Priority Data: 08/851,644 6 May 1997 (06.05.97) US (71) Applicant: CONTROL TECHNOLOGY CORPORATION [US/US]; 25 South Street, Hopkinton, MA 017481 (US). (72) Inventors: CRATER, Kenneth, C.; 116 Brigham Hill Road, North Grafton, MA 01536 (US). GOLDMAN, Craig, E.; 11 Woodcrest Road, Westborough, MA 01581 (US). (74) Agents: FRANK, Steven, J. et al.; Cesari and McKenna, LLP, 30 Rowes Wharf, Boston, MA 02110 (US).		(81) Designated States: AL, AU, BA, BB, BG, BR, CA, CN, CU, CZ, EE, GE, GW, HU, ID, IL, IS, JP, KP, KR, LC, LK, LR, LT, LV, MG, MK, MN, MX, NO, NZ, PL, RO, SG, SI, SK, SL, TR, TT, UA, UZ, VN, YU, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: DISTRIBUTED INTERFACE ARCHITECTURE FOR PROGRAMMABLE INDUSTRIAL CONTROL SYSTEMS

(57) Abstract

An integrated control system comprises one or more controllers each equipped to perform a control function and to gather data (ordinarily from sensors or a video camera) relevant to the control function. Each controller contains computer storage means, such as computer memory, for storing the relevant data and instructions, associated with the data, for causing a remote computer to generate a visual display incorporating the data in a predetermined format; and a communication module for establishing contact and facilitating data interchange with the remote computer. The remote computer, in turn, also includes a communication module compatible with the controller-borne module, and which enables the remote computer to download the data, including current video information and/or historical and/or reference video information, and associated instructions from one or more controllers. The remote computer also includes a facility for processing the instructions to create a user interface encoded by the instructions, and which incorporates the data. In this way, controller data is coupled to instructions for displaying that data, and this totality of information is continuously accessible, on a freely selective basis, to the remote computer.

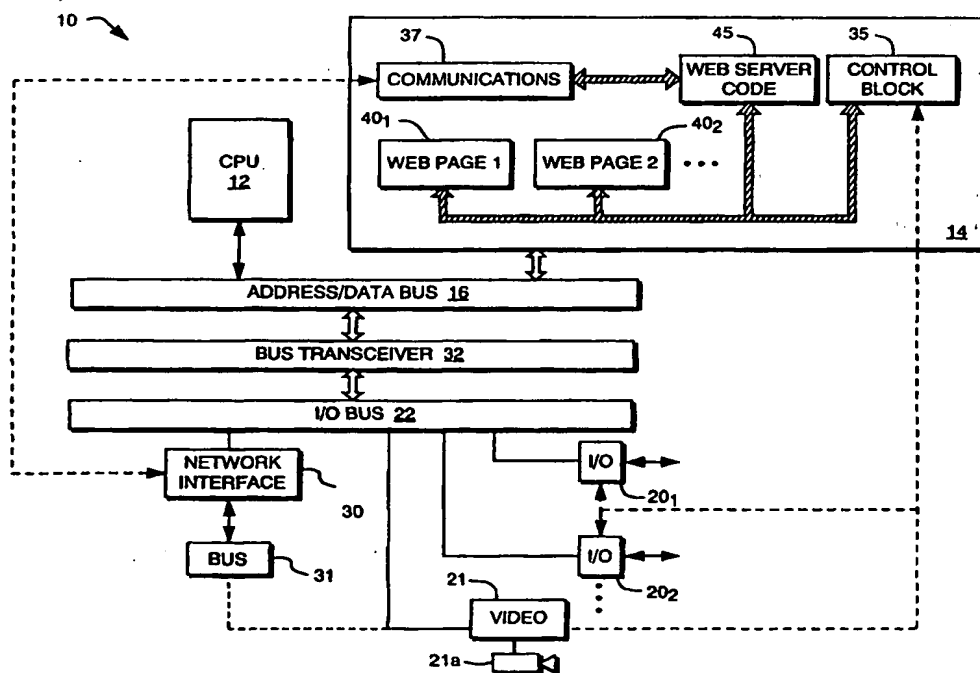

and which enables the remote computer to download the data, including current video information and/or historical and/or reference video information, and associated instructions from one or more controllers. The remote computer also includes a facility for processing the instructions to create a user interface encoded by the instructions, and which incorporates the data. In this way, controller data is coupled to instructions for displaying that data, and this totality of information is continuously accessible, on a freely selective basis, to the remote computer.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

**DISTRIBUTED INTERFACE
ARCHITECTURE FOR PROGRAMMABLE
INDUSTRIAL CONTROL SYSTEMS**

Cross Reference to Related Application

This is a continuation-in-part of Application Serial No. 08/655,469, filed May 30, 1996.

FIELD OF THE INVENTION

5 The present invention relates to industrial automation, and in particular to communication with and among programmable controllers for operating and monitoring industrial processes and equipment.

BACKGROUND OF THE INVENTION

Sophisticated industrial processes, such as oil refining, automobile
10 assembly or power generation, require the cooperative execution of numerous interdependent tasks by many different pieces of equipment. The enormous complexity of ensuring proper task sequencing and management, which requires not only procedural logic but constant
15 monitoring of equipment states to organize and distribute operations and detect malfunction, has resulted in the widespread adoption of programmable controllers. These controllers operate elaborate industrial equipment in accordance with a stored control program. When
20 executed, the program causes the controller to examine the state of the controlled machinery by evaluating signals from one or more sensing devices (e.g., temperature or pressure sensors), and to operate the machinery (e.g., by energizing or de-energizing operative components) based on a procedural framework, the sensor signals and, if necessary, more complex processing. The "inputs" to a particular controller can

extend beyond the sensed state of the equipment the controller directly operates to include, for example, its environment, the state of related machinery or the state of its controllers.

Control requirements become even more complex when different
5 aspects of the same overall process are assigned to remotely situated equipment. Such configurations often require reliable, high-bandwidth serial communication links to provide the necessary interconnection and handle data transfer among controllers and the sensors relevant to their operation.

10 Ordinarily, process operation is monitored, at least intermittently, by supervisory personnel by means of one or more central management stations. Each station samples the status of controllers (and their associated sensors) selected by the operator and presents the data in some meaningful format. The management station may or may not be
15 located on the same site as the monitored equipment; frequently, one central station has access to multiple sites (whether or not these perform related processes). Accordingly, communication linkage can be vital even in traditional industrial environments where process equipment is physically proximate, since at least some supervisory personnel may not
20 be.

To facilitate the necessary communication, the controller
processors and related computers (such as monitoring stations) are arranged as a computer network. A network, basically, is a collection of interconnected computers that use some consistent protocol to
25 communicate with one another. Typically, the network is organized such that any computer may communicate with any other network computer. The communication protocol provides a mechanism by which messages can be decomposed and routed to a destination computer identified by some form of address. The protocol may place a "header" of routing

information on each component of a message that specifies source and destination addresses, and identifies the component to facilitate later reconstruction of the entire message by the destination computer. This approach to data transfer permits the network to rapidly and efficiently
5 handle large communication volumes without reducing transfer speed in order to accommodate long individual messages, or requiring every network computer to process every network message. The degree of routing depends on the size of the network. Each computer of a local network typically examines the header of every message to detect
10 matches to that computer's identifier; multiple-network systems use routing information to first direct message components to the proper network.

Controllers have been interconnected by means of computer networks for some time; *see, e.g.*, U.S. Patent No. 5,307,463. In typical
15 systems, a monitoring computer, which may be remotely located from any or all of the controllers to which it has access, periodically queries the controllers to obtain data descriptive of the controlled process or machine, or the controller itself. This data is then available for analysis by the monitoring computer. Heretofore, however, the type of
20 information obtainable, on demand, from a controller has been limited, while the interface used to present the information on the monitoring computer is typically crude. The latter condition results from the multiplicity of data types offered by the controller. Were each type of data to be rendered in a format suited to that data, it would be necessary
25 to equip the monitoring computer with multiple interfaces, and configure the operating application to ascertain the type of data before selecting and launching the proper interface. Not only does this scheme impose a substantial real-time support burden on the monitoring computer, but would also require a constantly expanding repertoire of graphical
30 capabilities keyed to new forms of data reported by the controllers. This

can be especially cumbersome in highly -- even internationally -- distributed environments, since the controllers and their functionalities may be programmed by personnel having no contact with those responsible for central monitoring.

5 DESCRIPTION OF THE INVENTION

Brief Summary of the Invention

The present invention utilizes the capabilities of the Internet and, more particularly, the interactive capabilities made available by resources such as the World Wide Web to shift the burden of providing user
10 interfaces for changing forms of data from monitoring computers to the controllers that actually gather and report the data. By combining data with functionality for displaying that data at the individual controller sites, the need to equip monitoring computers with specialized graphic capabilities is eliminated, along with the need for intensive, ongoing
15 cooperation between engineers responsible for programming controllers and those who configure the computers that perform monitoring. Moreover, because Internet users are typically billed for connectivity at a single rate, the long-distance charges that would accrue through use of telephone lines for data communication are eliminated.

20 In accordance with the invention, an integrated control system comprises one or more controllers each equipped to perform a control function and to gather data (ordinarily from sensors) or visual information (e.g., from a video camera) relevant to the control function. "Relevant" data includes, at a minimum, any information upon which control
25 decisions are made or states shifted, but can also include information obtained from sensors not directly connected to the controller (e.g., involving other controlled machines) but which is nonetheless meaningful to supervisory personnel. For example, a chemical synthesis process

may be carried out at a temperature controlled to stay within an operating range, but the optimal temperature may depend on the output of a previous process feeding into the synthesis; in this case, the temperature of the synthesis process as well as the output of the previous process are relevant control parameters with respect to the synthesis process. Visual information may include real-time video or periodically sampled images of control panels, gauges indicating a parameter such as temperature, indicator lights or, most usefully, portions of the controlled equipment itself. In addition, a file which may be contained, for example, in the web page of the video transmission site computer, can include previously stored video data for comparison with current video data. For example, the stored data may be historical data comprising previously recorded video images of machine conditions at an earlier time, or may instead comprise reference images showing, for example, normal machine operation.

Each controller contains computer storage means, such as computer memory (volatile and/or non-volatile, such as random-access memory ("RAM"), programmable read-only memory ("ROM") or Flash ROM), or a mass storage device such as a hard disk or CD-ROM, for storing the relevant data and instructions, associated with the data, for causing a remote computer to present the data (e.g., by generating a visual display incorporating the data) in a predetermined format; and a communication module for establishing contact and facilitating data interchange with the remote computer. The remote computer, in turn, also includes a communication module compatible with the controller-borne module, and which enables the remote computer to download the data and associated instructions from one or more controllers. The remote computer also includes a facility for processing the instructions to create a user interface -- that is, a visual display, which may include video and/or graphics, or other presentations having a predetermined

format -- encoded by the instructions, and which incorporates the data or otherwise enables the monitoring engineer to gain as much information about the controller as possible. In this way, controller data is coupled to instructions for presenting that data, and this totality of information is
5 continuously accessible, on a freely selective basis, to the remote computer.

It should be stressed that the system may include more than one remote monitoring computer, and any of these may not, in fact, be "remote" (in terms of distance) at all; instead, they may reside at the
10 same site as the controlled process or equipment. Ordinarily, the monitoring computer or computers operate as peers with respect to the controllers on a flat network topology.

The invention facilitates a complete window into the operation of one or more controllers and, therefore, the industrial equipment they
15 operate. Using the invention, remotely located personnel can monitor the efficiency or overall behavior of the equipment, visually check machine components, workpieces, or other critical components of the controlled system. Additionally, the monitoring engineer can perform diagnostic checks, or even effect certain maintenance operations. For widely
20 dispersed control and supervisory operations, supervisory computers interact with the controllers over the Internet, with the controllers continuously connected to the Internet as "nodes." In local operations, the flexibility conferred by Internet formalisms can be retained on a restricted, internal network.

25 **Brief Description of the Drawings**

The foregoing discussion will be understood more readily from the following detailed description of the invention, when taken in conjunction with the accompanying drawings, in which:

FIG. 1 schematically depicts a controller in accordance with the present invention; and

FIG. 2 schematically depicts a system incorporating multiple controllers as shown in FIG. 1 and a browser-equipped computer capable of accessing data associated therewith.

Detailed Description of the Preferred Embodiments

The Internet, which can provide the communication medium of the present invention, is a worldwide "network of networks" that links millions of computers through tens of thousands of separate (but intercommunicating) networks. Via the Internet, users can access tremendous amounts of stored information and establish communication linkages to other Internet-based computers.

Much of the Internet is based on the *client-server* model of information exchange. This computer architecture, developed specifically to accommodate the "distributed computing" environment that characterizes the Internet and its component networks, contemplates a server (sometimes called the host) -- typically a powerful computer or cluster of computers that behaves as a single computer -- that services the requests of a large number of smaller computers, or clients, which connect to it. The client computers usually communicate with a single server at any one time, although they can communicate with one another via the server or can use the server to reach other servers. A server is typically a large mainframe or minicomputer cluster, while the clients may be simple personal computers. Servers providing Internet access to multiple subscriber clients are referred to as "gateways"; more generally, a gateway is a computer system that connects two computer networks.

In order to ensure proper routing of messages between the server and the intended client, the messages are first broken up into data

packets, each of which receives a destination address according to a consistent protocol, and which are reassembled upon receipt by the target computer. A commonly accepted set of protocols for this purpose are the Internet Protocol, or IP, which dictates routing information; and
5 the transmission control protocol, or TCP, according to which messages are actually broken up into IP packets for transmission for subsequent collection and reassembly. TCP/IP connections are quite commonly employed to move data across telephone lines.

The Internet supports a large variety of information-transfer
10 protocols. One of these, the World Wide Web (hereafter, simply, the "web"), has recently skyrocketed in importance and popularity; indeed, to many, the Internet is synonymous with the web. Web-accessible information is identified by a uniform resource locator or "URL," which specifies the location of the file in terms of a specific computer and a
15 location on that computer. Any Internet "node" -- that is, a computer with an IP address (e.g., a server permanently and continuously connected to the Internet, or a client that has connected to a server and received a temporary IP address) -- can access the file by invoking the proper communication protocol and specifying the URL. Typically, a URL
20 has the format *http://<host>/<path>*, where "http" refers to the HyperText Transfer Protocol, "host" is the server's Internet identifier, and the "path" specifies the location of the file within the server. Each "web site" can make available one or more web "pages" or documents, which are formatted, tree-structured repositories of information, such as text,
25 images, video, sounds and animations.

An important feature of the web is the ability to connect one document to many other documents using "hypertext" links. A link appears unobtrusively as an underlined portion of text in a document; when the viewer of this document moves his cursor over the underlined

text and clicks, the link -- which is otherwise invisible to the user -- is executed and the linked document retrieved. That document need not be located on the same server as the original document.

Hypertext and searching functionality on the web is typically
5 implemented on the client machine, using a computer program called a
"web browser." With the client connected as an Internet node, the
browser utilizes URLs -- provided either by the user or a link -- to locate,
fetch and display the specified documents. "Display" in this sense can
range from simple pictorial and textual rendering to real-time playing of
10 audio and/or video segments or alarms, mechanical indications, printing,
or storage of data for subsequent display. The browser passes the URL
to a protocol handler on the associated server, which then retrieves the
information and sends it to the browser for display; the browser causes
the information to be cached (usually on a hard disk) on the client
15 machine. The web page itself contains information specifying the
specific Internet transfer routine necessary to retrieve the document from
the server on which it is resident. Thus, clients at various locations can
view web pages by downloading replicas of the web pages, via
browsers, from servers on which these web pages are stored. Browsers
20 also allow users to download and store the displayed data locally on the
client machine.

Most web pages are written in HyperText Markup Language, or
HTML, which breaks the document into syntactic portions (such as
headings, paragraphs, lists, etc.) that specify layout and contents. An
25 HTML file can contain elements such as text, graphics, tables and
buttons, each identified by a "tag." Markup languages, however,
produce static web pages.

Recent innovations have allowed web-page designers to overcome
the static page appearance dictated by HTML. The Java language is a

well-known, machine-independent, interpreted computer language that facilitates dynamic display of information. Java-encoded "applets" are stand-alone programs embedded within web pages that can interact with the user locally, display moving animations and perform other functions on "Java-capable" browsers -- that is, browsers which include a Java interpreter. The applet is transferred to the browser along with other web-page information and is executed by the Java interpreter; the data acted upon by the applet can be located on the same or a different web page, or a different server entirely, since applets can themselves cause the browser to retrieve information via hypertext links.

ActiveX controls represent an alternative to Java, although they typically require compatible browsers and computers. These programs can be written in many computer languages (including Java) and usually compile to machine code, in which case they operate only in conjunction with browsers running machines with appropriate processor architectures. Some languages, however, will compile to machine-independent byte codes, which can run on a variety of processor architectures.

Suppose, for example, that a client user instructs the client-resident browser to obtain a document having the URL *http://host/file.html*. The browser contacts the HTTP server running on "host," and requests the document *file.html*. The server finds this document and sends it according to the proper Internet protocol, along with a Multipurpose Internet Mail Extension or "MIME" identifier that specifies the document's type. When the client receives the document, the browser examines the MIME to determine whether it is capable of autonomously displaying the document, or whether an external resource (e.g., a specialized viewer to display video segments) is necessary. In a simple case, the document might contain text and graphics specified in

HTML, and specify an image residing in a different file on a different server or on the same server. The browser renders the document in accordance with the HTML instructions and requests the image, displaying it in the document as specified by the instructions when the
5 image arrives. In more complex cases the document may contain, for example, Java instructions, which are passed to the browser's Java interpreter.

Key to the concept of a web page, therefore, is the division of functionality between the client-based browser and the server-based web
10 page, and the particular roles assigned to each. The browser locates, fetches and displays resources, executes hyperlinks and applets, and generally interprets web-page information; the web page contains data, hyperlink addresses, transfer protocols and computer instructions defining "potential functionality" that may be executed by the browser.

15 Ordinarily, web pages reside on servers accessible via the Internet. However, the above-discussed mode of splitting functions between web pages and browsers can be instituted on internal networks as well. These networks, sometimes called "intranets," support the TCP/IP communication protocol and typically serve the needs of a single
20 business (or business department), which may be located at a single site (with individual clients connected by a simple local-area network) or multiple physically dispersed sites requiring a wide-area network but not access to the Internet. Various of the computers forming the intranet network can be utilized as servers for web pages, each with its own URL
25 and offering access to network client computers via TCP/IP. A custom "web page" can be written for the controller in such an intranet. In such a case, JAVA applet software, or similar executable code, can be employed to design a page or screen providing a menu containing a variety of monitoring tools for the system. Various monitoring functions

can be executed by the controller when these monitoring tools are selected in accordance with a predetermined protocol or as selected by a monitoring engineer.

The manner in which this divided functionality can be incorporated into a bank of controllers and a monitoring system is illustrated in FIGS. 1 and 2. With reference, first, to FIG. 1, a representative controller architecture is shown generally at 10. The controller 10 executes program instructions to operate, for example, a piece of industrial equipment, and includes a central processing unit ("CPU") 12 and one or more computer storage devices indicated generally at 14. Ordinarily, storage device 14 is composed of a combination of volatile RAM for temporary storage and processing, and non-volatile, programmable read-only memory ("PROM") that contains permanent aspects of the controller's operating instructions; however, computer storage 14 can, if desired, include mass-storage facilities such as a hard disk, CD-ROM drive, etc. Such on-board devices are useful if web pages or security features are expected to change frequently.

CPU 12 and computer storage 14 communicate over an internal system bus 16. The system further includes a series of input/output modules shown representatively at 20₁, 20₂ that sense the condition of, and send control signals to, the controlled machine over a communication link (indicated by arrows). This communication link facilitates the bi-directional exchange of signals between each I/O module and an associated device (e.g., a sensor or an actuator).

In addition, the system includes video block 21 and a video camera (or a bank of video cameras) denoted generally at 21a. These are preferably digital video cameras associated with the monitored equipment which are directed at those portions of the monitored equipment which contain relevant visual information, such as operative machine

components from which the position or status of a workpiece can be verified. Video block 21 contains appropriate, conventional, circuitry for digitizing still images captured by video camera assembly 21a or for transmitting full motion video signals received from camera 21a as
5 streaming video over the Internet as part of a web site, for example, by way of any other suitable communication channel. In addition, video block 21 will be responsive to commands issued by a remote computer which commands may include: selection of a particular camera from the bank of video cameras, changing the orientation of a camera, altering the
10 video image capture rate of a particular camera, and/or responding to instructions regarding how the video information is to be transmitted. The signals from such a video camera assembly 21a will be an additional input to I/O bus 22 as shown in FIG. 1, or, optionally, to a separate high bandwidth bus 31 for communication to the network interface 30 (for
15 high bandwidth transmission of data to a network-based host).

I/O modules 20, as well as a network interface 30 that connects the controller 10 to a computer network, reside on or define a secondary I/O bus 22, which is driven by a bus transceiver 32; in effect, buses 16, 22 and bus transceiver 32 form a single logical bus. The computer
20 network may be a local-area network of machines communicating via, for example, the Ethernet protocol, or a direct link to the Internet. In a local-area network, the computers can implement TCP/IP over the low-level Ethernet hardware-management routines to create an intranet, or can instead (or in addition) be tied into the Internet as a node via, for
25 example, telephone hookup to an external host computer serving as a commercial Internet provider.

Storage 14 contains a series of functional blocks or modules that implement the functions performed by controller 10 through operation of CPU 12. A control block 35 contains instructions for operating I/O

modules 20. These instructions are read in rapid sequence and interpreted to examine the condition of selected sensing devices associated with the controlled equipment, and, based thereon, to cause the controller to send appropriate operative control signals to the equipment. Typically, the instructions are written in a relatively high-level language that permits not only manipulation of input and output data, but also arithmetic and timing functions, file-handling capabilities and other complex tasks. These instructions are translated into machine-readable code by means of an interpreter. For example, one standardized type of instruction symbolically represents control functions according to a relay ladder diagram; it is preferred, however, to utilize state-control languages that represent controller actions in terms of steps, each of which consists of a command that creates action and one or more instructions for leaving the step. Interpreters for these and other types of controller languages are well characterized in the art. *See, e.g.*, U.S. Patent Nos. 5,321,829 and 5,287,548 (the entire disclosures of which are hereby incorporated by reference) and the QUICKSTEP™ User Guide published by Control Technology Corporation, Hopkinton, MA. Control block 35 contains both the specific high-level instructions for operating the controller 10 and the interpreter module for translating these into instructions processed by CPU 12; its operative relationship to I/O modules 20 is indicated by the dashed line.

A network communication block provides programming to operate local-area network hardware and/or to connect with a remote network or network host. In the latter case, communication module 37 drives a modem within network interface 30 or other data-transmission circuitry to transfer streams of digitally encoded data over telephone or other communication lines.

Storage 14 also contains data structures defining one or more web pages shown representatively at 40₁, 40₂. The web pages 40 consist of

ASCII data obtained from one or more of I/O modules 20, HTML formatting instructions and associated data, "applet" instructions that cause a properly equipped remote monitoring computer 50 (FIG. 2) to display the data in a dynamic fashion, or hyperlinks to other web pages, objects or applets. For example, an applet might cause temperature data to be displayed as a graphical representation of a thermometer, with the height of the rendered mercury column dynamically varying in proportion to the data from I/O modules 20 (and constantly provided to the remote computer via network interface 30); pressure data might be represented in the form of a graphically rendered needle-type pressure gauge. Such renderings and the integration of data therein are straightforwardly implemented by those skilled in the art (and familiar, for example, with the Java language) without undue experimentation.

In accordance with the invention, web pages for the monitoring computer, or other remote computer in the control system, can be constructed to additionally display video information. Digital cameras (for example, which are available in miniature sizes and may operate on a 12 volt DC power supply), readily allow still image capture. Digital cameras capture images on a charge-coupled device, which images are then downloaded onto the RAM storage of the camera. Pictures may be transferred from the video camera assembly 21a and video block 21 to the monitoring computer 50 (FIG. 2) by way of the network interface 30 under command of the JAVA applet or other appropriate software for image reconstruction on the display monitor being used. Images can be downloaded from the camera to the controller computer and can be refreshed, as desired, with each download. Full motion video is readily achievable through use of appropriate video cameras in camera assembly 21a.

The resultant video information can then be transmitted from the controller 10 back to the monitoring computer 50, in the manner desired. For example, individual images or full motion video can be transferred back across the Internet to the web page of the monitoring computer 50. It is also possible to provide for switching between presentation formats, *e.g.*, from periodically refreshed still images to full motion video (typically in response to instructions issued by the monitoring computer). This may be useful, for example, in the case of a military installation or a nuclear site. Appropriate circuitry for accomplishing this switching will be provided in video block 21, as desired, in the particular application as will be understood by those skilled in the art.

A bank of video cameras can be arranged to provide alternative views of the monitored equipment, the monitoring computer or other meaningful visual information. When assessing operation of the controlled system, the monitoring engineer may select which video camera image from the images captured by the video camera bank is to be displayed, as well as the length of time such display is desired. The monitoring engineer scanning the video/graphic display may decide, for example, to make an adjustment to the equipment and to check visually to ascertain whether the expected response or event has occurred at the remote machine or in the remote process in response to the adjustment. Alternatively, database storage of the images can be provided to facilitate subsequent display of one or more images as part of the control sequence.

Moreover, historical and/or reference video data may be stored within, for example, a file contained in a web page of the computer at the video transmission site. As stated earlier, historical video data shows machine operation at an earlier time, while reference video data shows normal machine operation. This previously stored data may be selected

for presentation by a remote operator for comparison with current video images (e.g., in a side-by-side window configuration for simultaneous presentation, which may also include a graphic frame illustrating a selected control or comparison parameter).

5 Accordingly, the present invention permits a remote operator to visually check a portion of the controlled equipment to verify that the machine is operating in accordance with the data being received. For example, a command for controller actuation of a piston may be given and a video camera can be used to verify that the piston has been
10 actuated. Additionally, a video camera can transmit images of gauges for verification that a control parameter conforms to data received from the controlled system, or that a circuit breaker has opened and a portion or all of the system has been shut down. As will be understood by one skilled in the art, there are any number of useful visual checks that can
15 be performed by a monitoring engineer with respect to the controlled system using the video information obtained in accordance with the invention.

Referring again to FIG. 1, management and transmission of web pages 40 to a querying computer is handled by a web server module 45,
20 which allows controller 10 to function as a network server. Once again, the features of this module are conventional in the art; see, e.g., Yuval Fisher, *Spinning the Web* (Springer 1996).

Incoming data from I/O modules 20 may be processed by control block 35 before being copied into one of the web pages 40. Because of
25 the linking capabilities of the web, it is not necessary for the data to be stored in the web page containing the display instructions; instead, the latter page may contain a "hyperlink" pointer to a different web page in which data is accumulated. In addition, a web page can obtain data from other web pages (e.g., from different controllers) by accessing those web

pages when appropriate. For example, if a cluster of controllers is operationally related such that data from one is usefully combined with data from the others, each page of the cluster can contain instructions to access the other pages (or their associated data pages) when accessed by a user, and the applet configured to present data from the entire cluster. Alternatively, the applet can be configured to cause the client's browser to access the web page. As used herein, data is "associated with" a web page or an applet if it is stored as part of the web page or applet, or stored in a directly or indirectly hyperlinked web page.

10 Refer now to FIG. 2, which illustrates the manner in which multiple versions of the controller 10 are linked and queried by one or more monitoring computers. The querying computer 50, which functions as a network client, may be, for example, a personal computer running the Windows graphical user interface supplied by Microsoft Corp. Computer
15 50 includes a network interface 52, which facilitates connection to and data transfer through a computer network 55 (which may, again, be a local network, the Internet, or an Internet-linked local network). The communications relevant to the present invention are handled by a web browser 57, which resides within computer 50 and operates the
20 computer's display (e.g., video or liquid crystal) 60. Naturally, computer 50 also contains various conventional components, i.e., system storage, an operating system and a graphical user interface, and a keyboard and/or position-sensing device (e.g., a mouse) for accepting input from the user. For convenience of presentation, these are not shown.

25 Browser 57 contains functionality for locating and fetching, via network 55, web items (e.g., static pages or pages containing dynamic applets) identified by a URL, displaying these, executing applets, executing hyperlinks contained in web pages and selected by the user or invoked in an executing applet, and generally interpreting web-page

information. The web items ordinarily are contained in the web pages of one or more controllers 10₁, 10₂, etc. As explained earlier, the web pages contain data, hyperlink addresses, transfer protocols and computer instructions defining applets, or links thereto. Browser 57 may be any of
5 the numerous available web browsers, e.g., NETSCAPE NAVIGATOR (supplied by Netscape Communications Corp.) or MOSAIC (different versions of which are available free of charge at a variety of web sites).

In a working system, the network interface 30₁, 30₂, etc. of every controller in the system is constantly active and in communication with
10 network 55, facilitating access by computer 50 to any controller-based web page(s) at any time. In this way, computer 50 can examine the data associated with any controller merely by specifying the appropriate URL of the controller's primary web page. The web page (and, preferably, an applet associated therewith) is copied to browser 57 and displayed along
15 with the relevant, timely data. For example, the applet, executing on client computer 50, can autonomously access data from a web page different from the primary page the client user originally specified, all in a manner completely invisible to the user. Such access can be periodic or essentially continuous for data subject to rapid change.

20 Naturally, the network accessibility of control data, particularly over the Internet, raises security issues. It may be desirable to equip controller-based web pages with a password access feature, whereby browser 57 or an executing applet must present a password before being accorded access to associated data. In addition, the data may be
25 encrypted before being placed on the network. These functions are handled by communication module 37, which acts as a gatekeeper to web server module 45. Security-clearance functions are conventional and readily implemented by those skilled in the art.

Security becomes particularly important if the controller-based web pages allow client computer 50 not only to access data, but to modify it as well. For example, while "read-only" access to control data suffices to inform the client user of the state of a controlled machine or process, the user cannot, if limited to such access, influence the operation of the controller. It may prove desirable, therefore, to allow an appropriately authorized client to directly modify control parameters (which may, for example, be stored on a restricted-access web page) that determine the operation of the controller and, hence, the controlled machine or process. Indeed, a controller-based applet invoked by the user's interaction with one of the controller's web pages can permit the remotely situated client user to operate the controller hardware -- for example, causing the controller to execute a reset routine that restarts automated equipment following shutdown, or causing the controller to operate in a step-by-step fashion for diagnostic purposes.

It will therefore be seen that the foregoing represents a highly extensible and flexible approach to remote access to and presentation of controller information. The terms and expressions employed herein are used as terms of description and not of limitation, and there is no intention, in the use of such terms and expressions, of excluding any equivalents of the features shown and described or portions thereof, but it is recognized that various modifications are possible within the scope of the invention claimed.

CLAIMS

- 1 1. A controller capable of interacting with a remotely located monitoring
2 station, the controller comprising:
 - 3 a. means for gathering current video information relevant to a
4 control function, the current video information being retrievable
5 by the remotely located monitoring station;
 - 6 b. means for transmitting said current video information to said
7 remotely located monitoring station; and
 - 8 c. means for causing the remotely located monitoring station to
9 present the current video information in a predetermined format.
- 1 2. The controller of claim 1 wherein said means for gathering current
2 video information is a plurality of video cameras positioned to retrieve
3 said current video information relevant to said control function connected
4 such that at least one of said video cameras can be selected to display
5 said current video information at said monitoring station in said
6 predetermined format.
- 1 3. The controller of claim 1 wherein said means for gathering current
2 video information is at least one video camera having a selectable
3 orientation and an image capture rate.
- 1 4. The controller of claim 3 wherein said video camera is a digital video
2 camera providing images for transmission to said monitoring station and
3 display on said monitoring station in said predetermined format.
- 1 5. The controller of claim 1 wherein said means for transmitting current
2 video information includes a transmission medium coupled between said

3 controller and said remotely located monitoring station, said transmission
4 medium including a computer network.

1 6. The controller of claim 4 wherein said predetermined format in which
2 said current video information is presented is periodically refreshed digital
3 images.

1 7. The controller of claim 4 wherein said predetermined format in which
2 said current video information is presented is full motion video.

1 8. The controller of claim 4 wherein said predetermined format in which
2 said current video information is presented is a video display with a
3 graphic frame inserted on one portion of said video display illustrating a
4 selected control parameter.

1 9. The controller of claim 1 further comprising:

2 a. a source of comparison video information comprising at least
3 one of historical video information and reference video information
4 relevant to a control function; and

5 b. means for causing the remotely located monitoring station to
6 present said comparison video information in a predetermined format.

1 10. The controller of claim 9 wherein said predetermined format in
2 which said comparison video information is presented comprises side-by-
3 side presentation of said current video information with said comparison
4 video information.

1 11. The controller of claim 10 wherein said predetermined format also
2 includes a graphic frame inserted on one portion of said side-by-side
3 presentation illustrating a selected control or comparison parameter.

1 12. The controller of claim 1 further comprising security means for
2 preventing data interchange between the controller and an unauthorized
3 user.

1 13. An integrated control system comprising:

2 a. at least one controller comprising:

- 3 i. means for performing a control function;
4 ii. means for gathering data and video information relevant
5 to the control function;
6 iii. computer storage means for storing (a) said data and
7 video information and (b) instructions, associated with
8 said data and video information, for causing a computer
9 to present said data and video information in a
10 predetermined format; and
11 iv. means for facilitating data and video interchange with a
12 remotely located computer;

13 b. at least one monitoring computer comprising:

- 14 i. means for facilitating data and video interchange with at
15 least one selected controller to obtain therefrom the data,
16 video information and the instructions; and
17 ii. means for presenting the data and video information in
18 the predetermined format.

1 14. The system of claim 13 wherein the means for facilitating data and
2 video interchange of the controllers and of the monitoring computer are
3 connected by a computer network.

1 15. The system of claim 13 wherein the means for facilitating data and
2 video interchange and the means for presenting the data and video
3 comprise a web browser configured to generate a visual display.

1 16. The system of claim 13 wherein the instructions cause the data and
2 video to be visually displayed in an interactive user interface.

1 17. The system of claim 13 wherein the controller and the monitoring
2 computer are connected by way of the Internet.

1 18. The system of claim 13 wherein said means for gathering video
2 information relevant to said control function includes a bank of video
3 cameras positioned to generate a plurality of images of said control
4 system, and further comprising means for selecting any one of said video
5 cameras to display a selected image of said control system.

1 19. A controller capable of interacting with a remotely
2 located computer, the controller comprising:
3 a. means for gathering data relevant to a control
4 function, the data being retrievable by the
5 remotely located computer;
6 b. computer storage means comprising instructions
7 retrievable and executable by the remotely located
8 computer, the instructions being associated with
9 the data and causing the remotely located computer
10 to present the data in a predetermined format.

1 20. The controller of claim 19 further comprising a
2 communication module for facilitating data interchange
3 between the controller and a remotely located computer.

1 21. The controller of claim 20 wherein the instructions
2 cause the data to be visually displayed in an interactive
3 user interface.

1 22. The controller of claim 20 wherein the communication
2 module connects to the Internet so as to make the
3 controller a continuously active Internet node.

1 23. The controller of claim 19 wherein at least some of
2 the data is resident on a different controller, the data-
3 gathering means being configured to access and obtain the
4 data from the different controller via a computer
5 network.

1 24. The controller of claim 19 wherein at least some of
2 the data is resident on a different controller, the
3 instructions causing the remotely located computer to
4 obtain the data from the different controller via a
5 computer network.

1 25. The controller of claim 19 wherein the data is
2 continuously generated, the instructions causing the
3 remotely located computer to continuously retrieve and
4 present changing data.

1 26. The controller of claim 20 wherein the communication
2 module comprises security means for preventing data
3 interchange between the controller and an unauthorized
4 computer.

1 27. An integrated control system comprising:
2 a. at least one controller comprising:
3 i. means for performing a control function;
4 ii. means for gathering data relevant to the
5 control function;
6 iii. computer storage means for storing (a) the
7 data and (b) instructions, associated with
8 the data, for causing a computer to present
9 the data in a predetermined format; and
10 iv. means for facilitating data interchange
11 with a remotely located computer;
12 b. at least one monitoring computer comprising:
13 i. means for facilitating data interchange
14 with at least one selected controller to

15 obtain therefrom the data and the
16 instructions; and
17 ii. means for presenting the data in the
18 predetermined format.

1 28. The system of claim 27 wherein the means for
2 facilitating data interchange of the controllers and of
3 the monitoring computer are connected by a computer
4 network.

1 29. The system of claim 27 wherein the means for
2 facilitating data interchange and the means for
3 presenting the data comprise a web browser configured to
4 generate a visual display.

1 30. The system of claim 27 wherein the instructions cause
2 the data to be visually displayed in an interactive user
3 interface.

1 31. The system of claim 27 wherein the communication
2 modules connect to the Internet, the communication
3 modules of the controllers being continuously connected
4 so as to make the controllers continuously active
5 Internet nodes.

1 32. The system of claim 27 wherein at least some of the
2 data is resident on a plurality of controllers, the means
3 for facilitating data interchange of the monitoring
4 computer being configured to access and obtain the data
5 from the controllers via a computer network.

1 33. The system of claim 27 wherein at least some of the
2 data is resident on a plurality of controllers, the
3 instructions causing a monitoring computer to obtain the
4 data from the controllers via a computer network.

1 34. The system of claim 27 wherein the data is
2 continuously generated, the instructions causing a
3 monitoring computer to continuously retrieve and display
4 changing data.

1 35. The system of claim 27 wherein the means for
2 facilitating data interchange of the controllers comprise
3 security means for preventing data interchange between
4 the controllers and an unauthorized monitoring computer.

1 36. A method of obtaining and presenting data associated
2 with a control system, the method comprising:
3 a. providing at least one controller comprising:
4 i. means for performing a control function;
5 ii. means for gathering data relevant to the
6 control function;
7 iii. means for storing (a) the data and (b)
8 instructions, associated with the data, for
9 causing a computer to present the data in a
10 predetermined format;
11 b. causing the at least one controller to perform
12 the control function and to gather the data;
13 c. causing a computer to access the data and execute
14 the instructions, thereby presenting the data in a
15 predetermined format.

1 37. The method of claim 36 wherein at least some of the
2 data is resident on a plurality of controllers, and
3 further comprising the step of causing the computer to
4 access and obtain the data from the controllers via a
5 computer network.

1 38. The method of claim 36 wherein at least some of the
2 data is resident on a plurality of controllers, and
3 further comprising the step of causing the computer to
4 obtain the data from the controllers via a computer
5 network.

1 39. The method of claim 36 wherein the data is
2 continuously generated, the instructions causing the
3 computer to continuously retrieve and display changing
4 data from at least one controller.

1 40. The method of claim 36 further comprising the step of
2 preventing data interchange between the controllers and
3 an unauthorized computer.

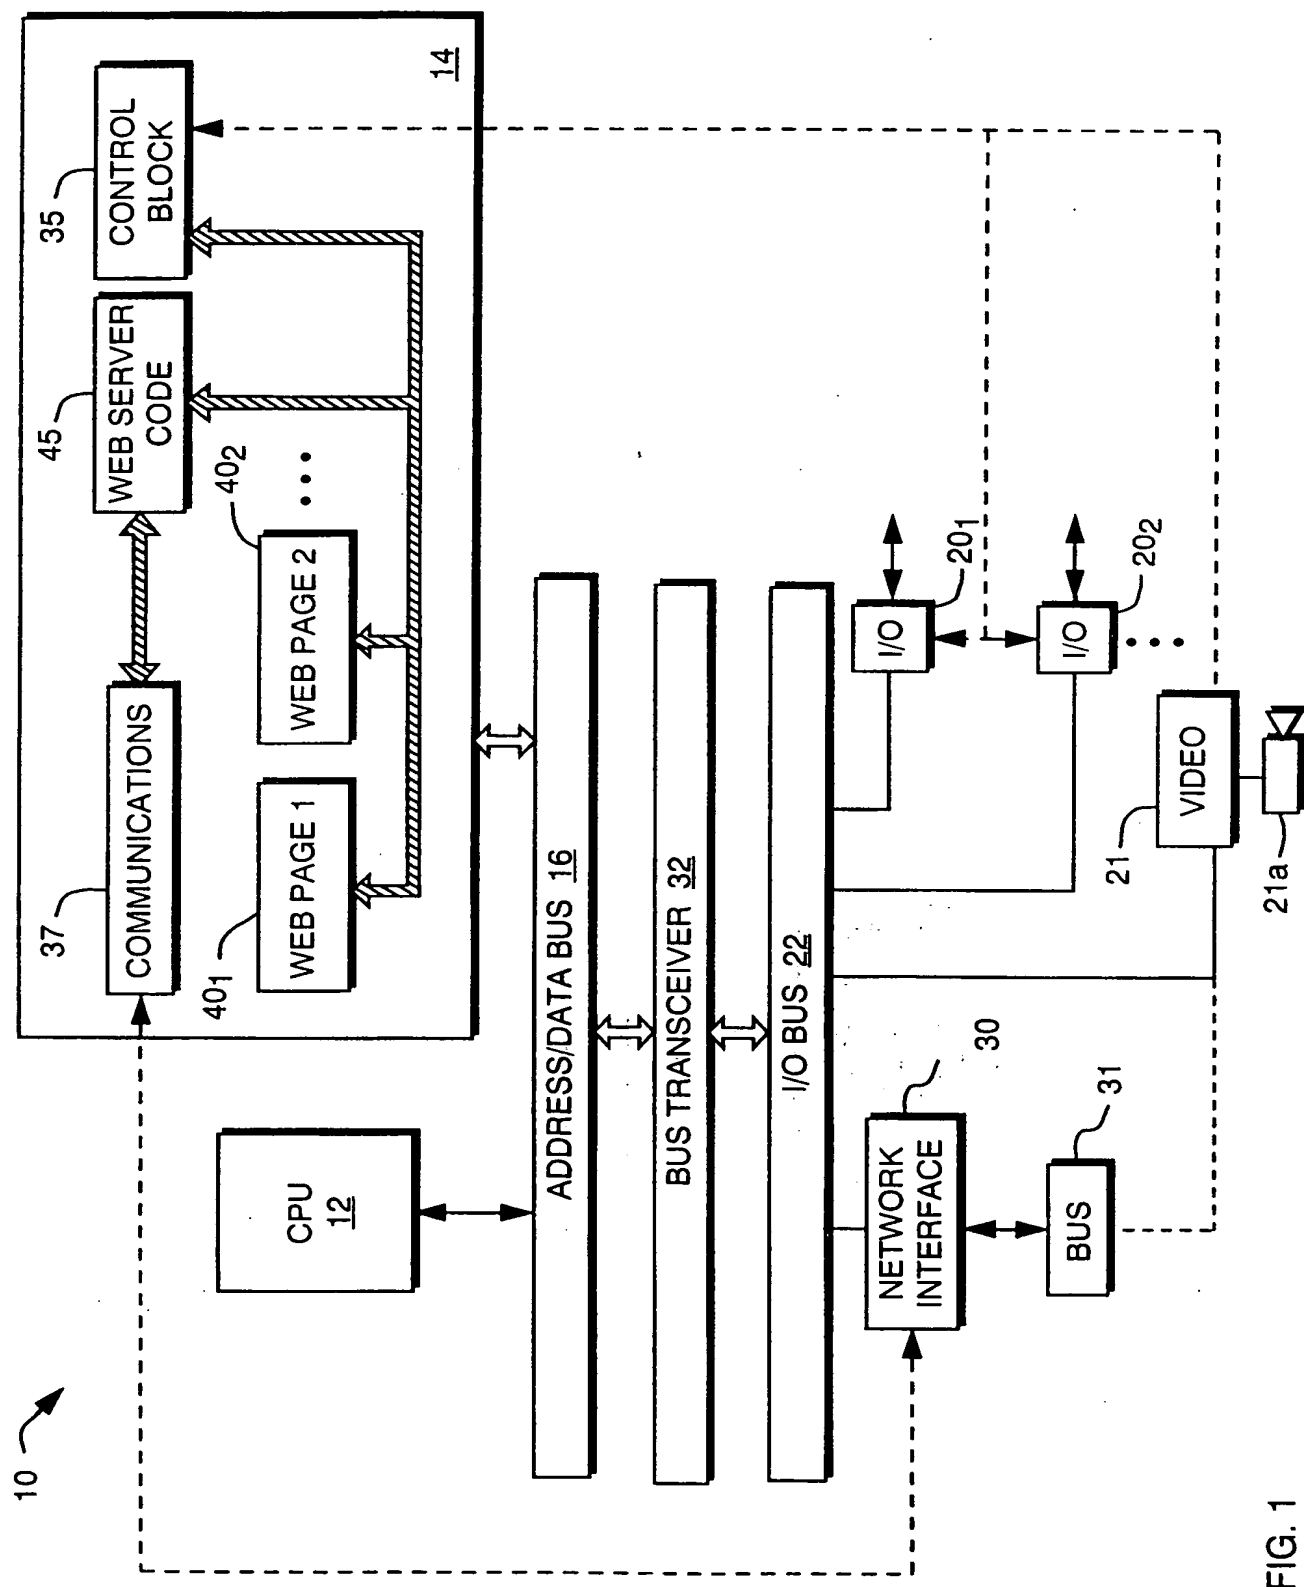


FIG. 1

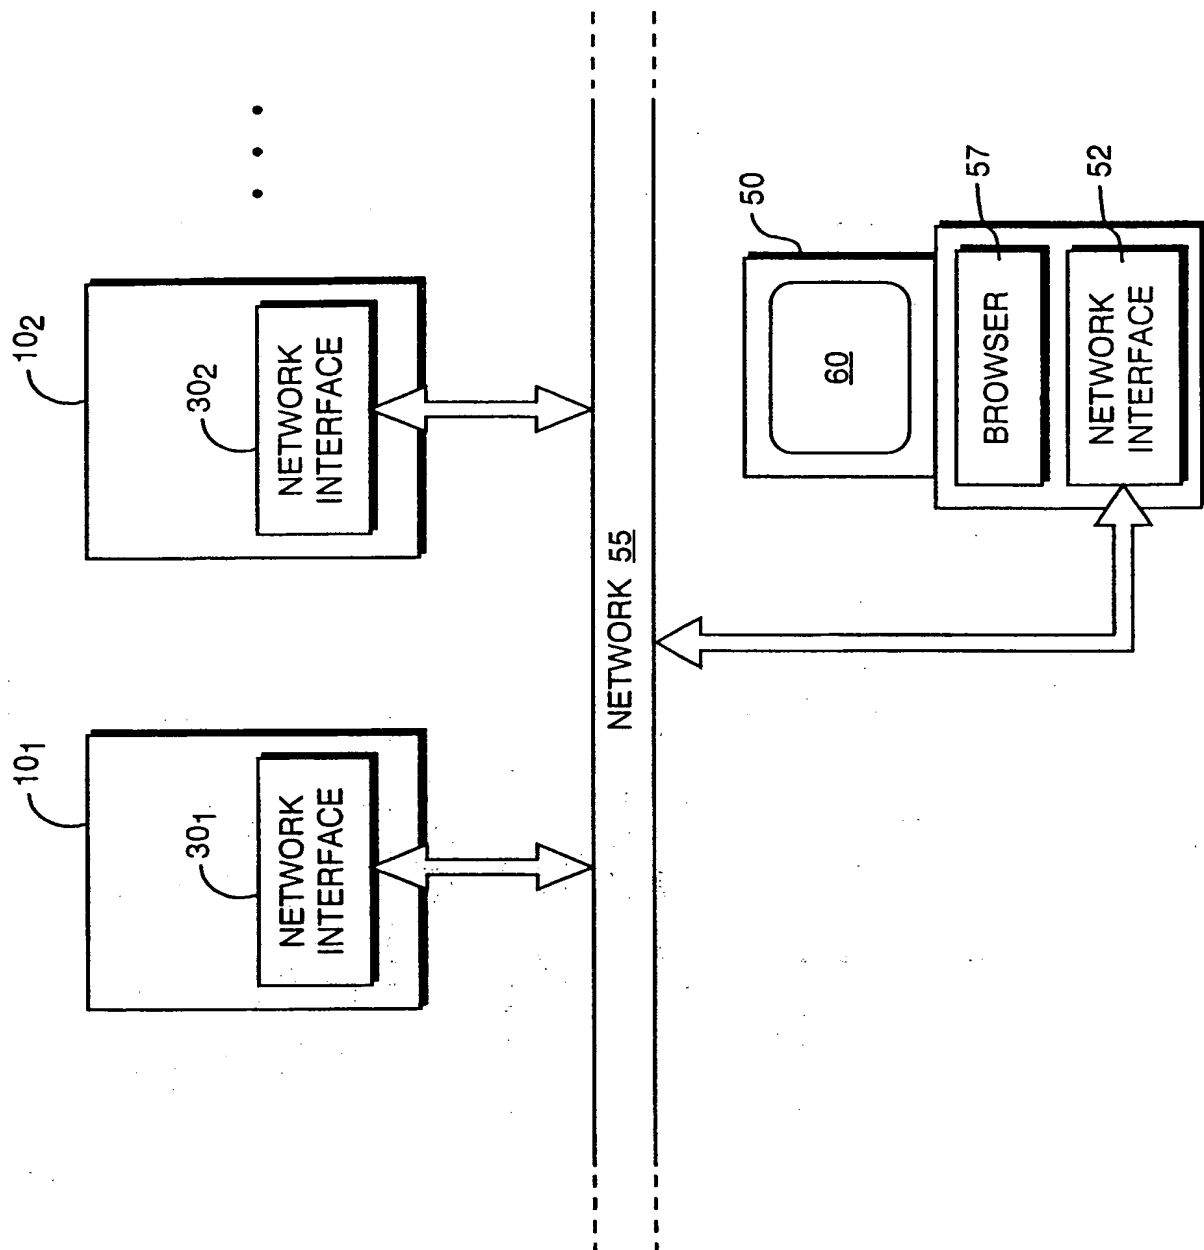


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/09226

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G05B19/409 B25J9/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G05B B25J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GOLDBERG K ET AL: "Beyond the Web: manipulating the real world" COMPUTER NETWORKS AND ISDN SYSTEMS, vol. 28, no. 1, December 1995, page 209-219 XP004001227 see the whole document	1,3-8, 12-17, 19-40
Y	---	2,9-11, 18
Y	WO 96 31047 A (JAIN RAMESH ; WAKIMOTO KOJI (US); KATKERE ARUN (US); MOEZZI SAIED () 3 October 1996 see abstract see page 33, paragraph 2 see page 79, paragraph 5; figure 16 --- -/-	2,9-11, 18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 September 1998

Date of mailing of the international search report

18/09/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Helot, H

INTERNATIONAL SEARCH REPORT

Inter: nal Application No

PCT/US 98/09226

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 411 869 A (WESTINGHOUSE ELECTRIC CORP) 6 February 1991 see column 5, line 36 - line 55; figure 2 ---	9-11
A	WO 97 07486 A (PRISM VIDEO INC) 27 February 1997 see abstract; figure 1 see page 11, line 28 ---	1,13,19, 27,36
A	GERTZ M W ET AL: "A HUMAN-MACHINE INTERFACE FOR DISTRIBUTED VIRTUAL LABORATORIES" IEEE ROBOTICS & AUTOMATION MAGAZINE, vol. 1, no. 4, 1 December 1994, pages 5-13, XP000487137 -----	1,13,19, 27,36

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/09226

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
W0 9631047 A	03-10-1996	US 5729471 A AU 5380296 A US 5745126 A	17-03-1998 16-10-1996 28-04-1998
EP 0411869 A	06-02-1991	US 5167010 A ES 2070281 T JP 3071340 A	24-11-1992 01-06-1995 27-03-1991
W0 9707486 A	27-02-1997	AU 6851596 A	12-03-1997

THIS PAGE BLANK (USPTO)